



Electric


Sky Link EP

E261XM

Wing Span	Wing Area	Flying Weight	Fuselage Length
41 in / 1040 mm	264 sq in / 17 sq dm	26 oz / 740 g	30 in / 760 mm

Requires

4-channel radio w/ 4 micro servos,
20A brushless ESC, Outrunner Motor KM0283010 w/ Propeller Adaptor HW2340100,
3 cells 11.1V 2100mAh Li-Po battery & charger

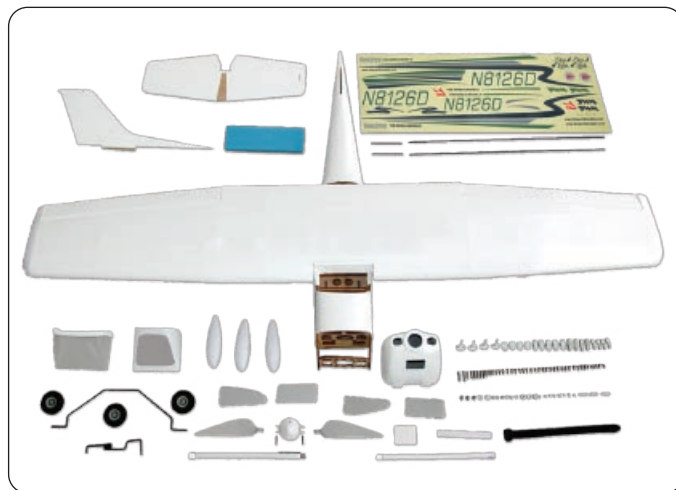

- Scale park flyer fabricated with top quality balsa and plywood.
- Covered with genuine heat shrink World Models' LighTex coverings.
- Strong wood structure and tough covering give the airframe the best load to weight ratio and capability for further power upgrades.
- Comes with 10x6 folding propeller for direct drive.
- Full house controls (ailerons, elevators, rudder and throttle) extend maneuvering limits and deliver scale flying.

COVERINGS CODE NOS. **SGX100**
COLOR SCHEMES



E261XM

WMA accessories

Optional Accessories Recommended

<p>Propeller Adaptor</p> <p style="font-size: x-small; color: red;">HW2340100</p>	<p>High Performance Outrunner 28/30</p> <p style="font-size: x-small; color: red;">KM0283010</p>
--	---

⚠ The Following accessories are not included in this package

Max Speed	12,000 rpm
Operating Power	180 W
Operating Voltage	6-12 V
Operating Current	15 A
Peak Current	20 A (max 15 s)
Internal Resistance	95 mΩ
Kv (rpm/V)	1015
Shaft Diameter	3 mm
Length	30 mm

ELECTRIC POWER ⚡



Electric

Melting EP

E259XM

Wing Span	Wing Area	Flying Weight	Fuselage Length
36.5 in / 930 mm	346 sq in / 22.3 sq dm	26.5 oz / 750 g	41.5 in / 1050 mm

Requires

4-channel radio w/ 4 micro servos,
20A brushless ESC, Outrunner motor KM0283010 w/ Propeller Adaptor HW2340100,
3 cells 11.1V 2100 mAh Li-Po battery and charger



- Aerobatic park flyer fabricated with top quality balsa and plywood.
- Covered with genuine heat shrink World Models' LighTex covering.
- Strong wood structure and tough covering give the airframe the best load to weight ratio.
- Full house controls (ailerons, elevator, rudder and throttle) extend maneuvering limits.

COVERINGS CODE NOS. **SGX251/SGX350/SGX311/SGX100/SGX331/SGX259000**
COLOR SCHEMES



E259XM

WMA accessories

Optional Accessories Recommended

<p>Propeller Adaptor</p> <p style="font-size: x-small; color: red;">HW2340100</p>	<p>High Performance Outrunner 28/30</p> <p style="font-size: x-small; color: red;">KM0283010</p>
--	---

⚠ The Following accessories are not included in this package

Max Speed	12,000 rpm
Operating Power	180 W
Operating Voltage	6-12 V
Operating Current	15 A
Peak Current	20 A (max 15 s)
Internal Resistance	95 mΩ
Kv (rpm/V)	1015
Shaft Diameter	3 mm
Length	30 mm

ELECTRIC POWER ⚡